


IntelliAg® Monitor and Control




Base System - Planter

- IntelliAg Virtual Terminal AI-120 12" color touch screen
- Tractor harness for use virtual terminal
- System power harness with ISO hitch connector
- ISO master switch to control on/off
- Hitch extension harness
- PDC - WSMT2
- WSMT2 T harness
- Control harness for connection to valves and feedback sensors

Module
WSMB2




Seed singulation and spacing quality are available when using the WSMB2 module.

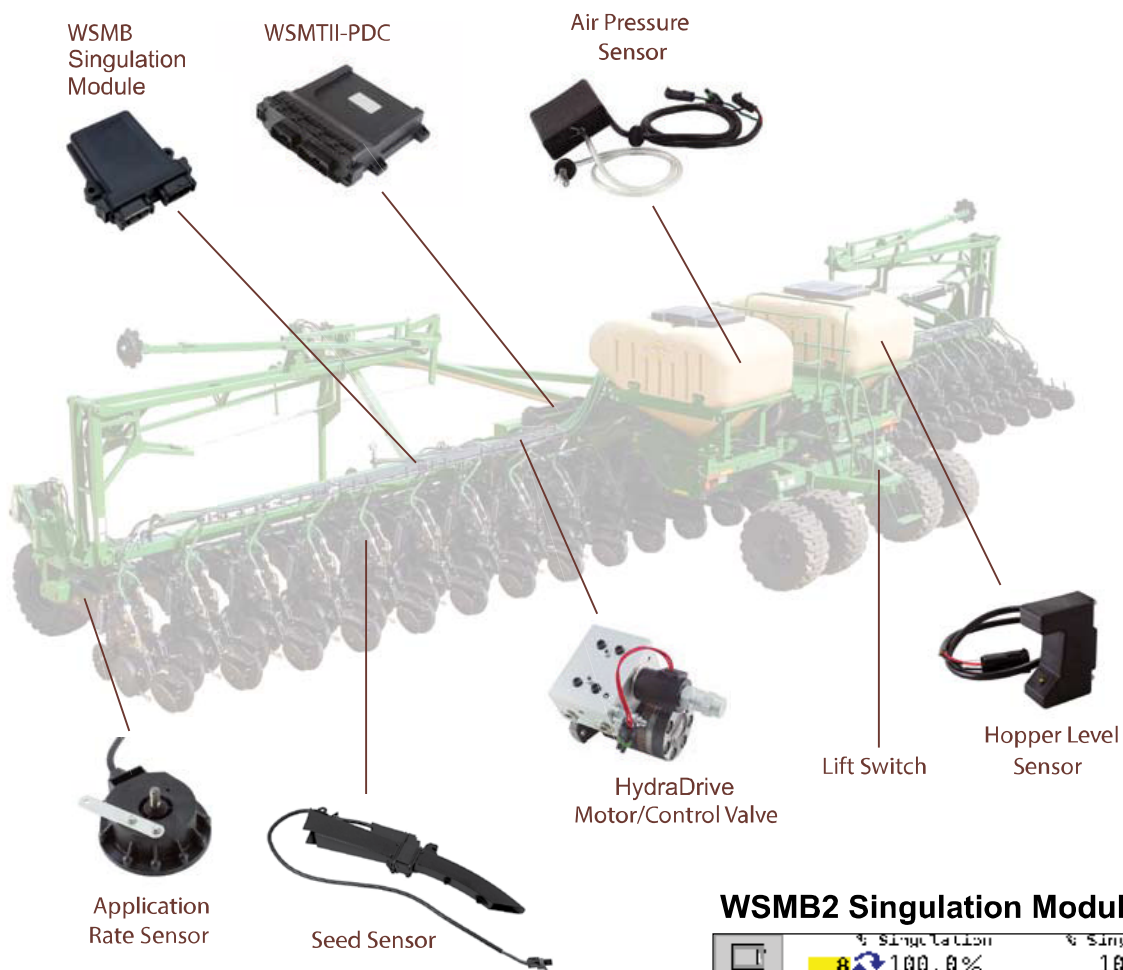

WSMB2 Singulation Module Display

8	% Singulation	100.0%	100.0%
1	% Singulation	100.0%	100.0%
8	% Spacing Quality	100.0%	100.0%
1	% Spacing Quality	0.0%	0.0%
8	% Skips	0.0%	0.0%
1	% Skips	0.0%	0.0%
8	% Multiples	0.0%	0.0%
1	% Multiples	0.0%	0.0%

Bargraph range calculation:
100 - value = bottom bargraph value

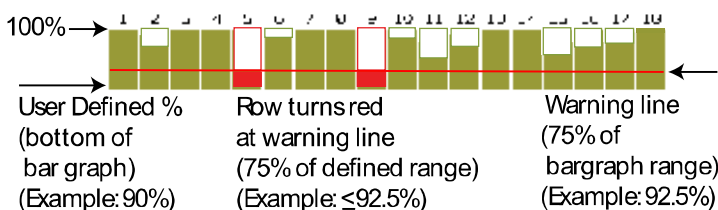

IntelliAg Work Screen displaying Seed Singulation %, Spacing Quality, Skips and Multiples

