


ELECTROMAGNETIC FLOWMETER - EMFLOW

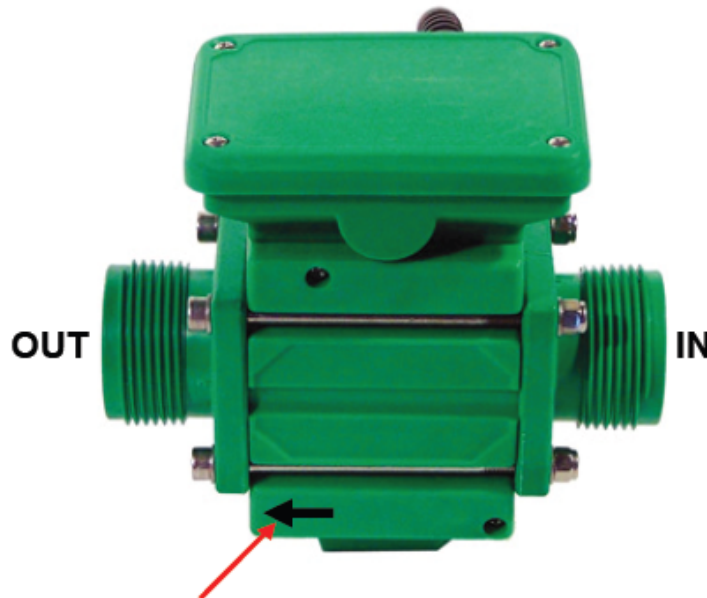

Black Arrow indicates direction of flow through the meter.

ALWAYS MOUNT THE FLOWMETER VERTICALLY WITH THE ARROW POINTING UP!

General Specifications

Body:	Polypropylene - Glass reinforced , Hydrolytically Stable		
Internal Tunnel:	Delrin		
Input Power:	12 VDC		
Wiring Connections:	A - Brown:	+12VDC	
	B - White:	Ground	
	C - Green:	Output Signal (Square Wave Pulse 0-12 VDC)	

	1/4" Flowmeter	1/2" Flowmeter	1" Flowmeter	1.5" Flowmeter	2" Flowmeter
Port Fitting Size:	3/4" Male BSP	3/4" Male BSP	1" Male BSP	1.5" Male BSP	2" Male BSP
Flow Rate:	1-15LPM	3-60LPM	10-200LPM	20-400LPM	45-900LPM
Flowmeter Constant:	1200P/L	600P/L	600P/L	200P/L	100P/L
Maximum pressure:	50 Bar	50 Bar	50 Bar	40 Bar	20 Bar

WE THINK AHEAD, WE DESIGN TO LAST